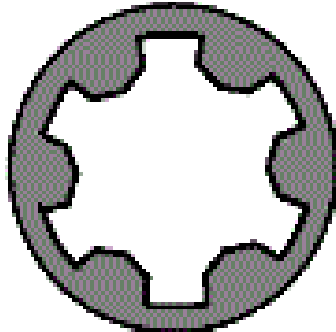
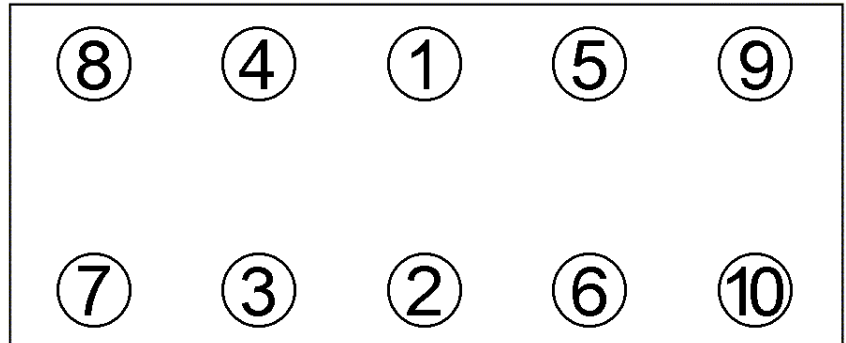


**Anziehvorschrift Zylinderkopf****Tightening Instructions for Cylinder Head****Instructions de serrage pour culasse****Prescripciones de apriete para culatas****076.408**passend für / suitable for  
adaptable à / adaptable a**Fiat/Lancia/Opel****Das Original**Schraubenkopf / Head shape Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete  
Tête de vis / Cabeza de tornillo

374.240

M 10x1,25x119

Anziehen/  
Tightening/  
Serrage/  
Apriete

40 Nm

90°

90°

**Zeichenerklärung / Explanations / Explication / Explicacion**

	neue Zylinderkopf-schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
*	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
➤	Drehwinkel	torque angle	angle de serrage	ángulo de giro

**Motortyp / Engine type / Type de moteur / Tipo de motor**

÷ 0,92 mm, Ø 70,6 mm, 2 Löcher/holes/trous/agujeros/fori

Mot.: 188A9.000, Y13DT, Z13DT, Z13DTJ, Z13DTH

1,3 ltr. Diesel JTD

500, Doblo, Nuova Panda, Idea, Doblo, Palio, Punto, Siena

Ypsilon, Musa

Astra, Agila, Combo, Corsa, Meriva

**Elring-Serviceteam**

Fon +49 7123 724 799

Fax +49 7123 724 798

[service@elring.de](mailto:service@elring.de)

24/01/22

**\*076.408\***