



FLEETRANNER™ 45° SILICONE HOSE


PRODUCT TYPE: COOLING SYSTEMS

RECOMMENDED FOR: Coolant hose for passenger cars, trucks, buses, tractors and other industrial-type applications requiring versatile, symmetrical, 45° hose. Easy to cut to size and to install.

RESISTANT TO: Resistant to the harmful conditions under the bonnet; ozone, weathering and a variety of coolants. OAT resistant.

CONSTRUCTION:

- SHAPE:** Preformed
- TUBE:** Silicone
- REINFORCEMENT:** Knitted Polyester
- WIRE:** -
- COVER:** Silicone

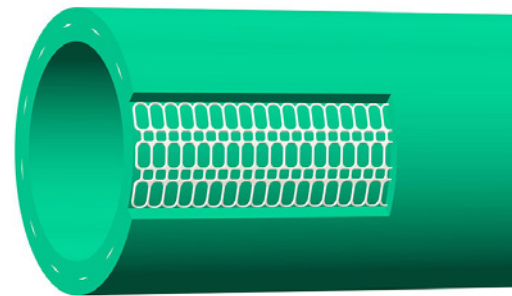

STANDARDS: **SAE NORM** SAE J20R1 class A except burst

DIN NORM -

TEMPERATURE: -50° 180° 200°

| Gates | PN | | | | | | | | | | |
|--------|------------|----|-------|----|-----|-----|-----|-----|-----|-----|---|
| | | mm | " | mm | m | | | | | | |
| 8106ES | 4281-18106 | 6 | 1/4 | 14 | 0.3 | - | 150 | 5.7 | 22 | 254 | 3 |
| 8108ES | 4281-18108 | 8 | 1/3 | 18 | 0.3 | - | 150 | 5.7 | 22 | 254 | 3 |
| 8110ES | 4281-18110 | 10 | 3/8 | 20 | 0.3 | - | 150 | 5.7 | 22 | 254 | 3 |
| 8112ES | 4281-18112 | 12 | 1/2 | 22 | 0.3 | 18 | 150 | 4.6 | 19 | 254 | 3 |
| 8115ES | 4281-18115 | 15 | 3/5 | 25 | 0.3 | 22 | 150 | 4 | 16 | 203 | 3 |
| 8118ES | 4281-18118 | 18 | 2/3 | 28 | 0.3 | 27 | 150 | 4 | 12 | 203 | 3 |
| 8122ES | 4281-18122 | 22 | 7/8 | 32 | 0.4 | 33 | 200 | 3 | 10 | 177 | 3 |
| 8125ES | 4281-18125 | 25 | 1 | 35 | 0.4 | 37 | 200 | 3 | 10 | 177 | 3 |
| 8128ES | 4281-18128 | 28 | 1 1/8 | 38 | 0.4 | 42 | 200 | 3 | 9 | 152 | 3 |
| 8130ES | 4281-18130 | 30 | 1 1/5 | 40 | 0.6 | 45 | 300 | 2.8 | 9 | 127 | 3 |
| 8132ES | 4281-18132 | 32 | 1 1/4 | 42 | 0.6 | 48 | 300 | 2.8 | 9 | 101 | 3 |
| 8135ES | 4281-18135 | 35 | 1 3/8 | 45 | 0.6 | 53 | 300 | 2.5 | 8 | 76 | 3 |
| 8138ES | 4281-18138 | 38 | 1 1/2 | 48 | 0.6 | 57 | 300 | 2.5 | 8 | 54 | 3 |
| 8140ES | 4281-18140 | 40 | 1 5/9 | 50 | 0.6 | 60 | 300 | 2.3 | 7 | 50 | 4 |
| 8145ES | 4281-18145 | 45 | 1 3/4 | 55 | 0.6 | 60 | 300 | 2.1 | 7 | 40 | 4 |
| 8150ES | 4281-18150 | 50 | 2 | 60 | 0.6 | 75 | 300 | 1.8 | 6.5 | 30 | 4 |
| 8155ES | 4281-18155 | 55 | 2 1/5 | 65 | 0.6 | 82 | 300 | 1.8 | 6 | 25 | 4 |
| 8160ES | 4281-18160 | 60 | 2 3/8 | 70 | 0.6 | 90 | 300 | 1.6 | 5.5 | 25 | 4 |
| 8165ES | 4281-18165 | 65 | 65 | 75 | 0.6 | 98 | 300 | 1.6 | 5.2 | 20 | 4 |
| 8170ES | 4281-18170 | 70 | 2 3/4 | 80 | 0.6 | 105 | 300 | 1.6 | 5 | 20 | 4 |
| 8175ES | 4281-18175 | 75 | 3 | 85 | 0.6 | 112 | 300 | 1.4 | 4.5 | 20 | 4 |